

MH806


Wireless Mini Siren Box

User Manual

Introduction

MH806 is a slave unit that has siren function only, can't be used in signal. Mainly used to connect with master unit (e.g. PIR camera, PIR siren, Magnet alarm etc.) to construct security system. Siren when receive wireless signal from the connected 800 series alarm.

MH806 Mini Siren

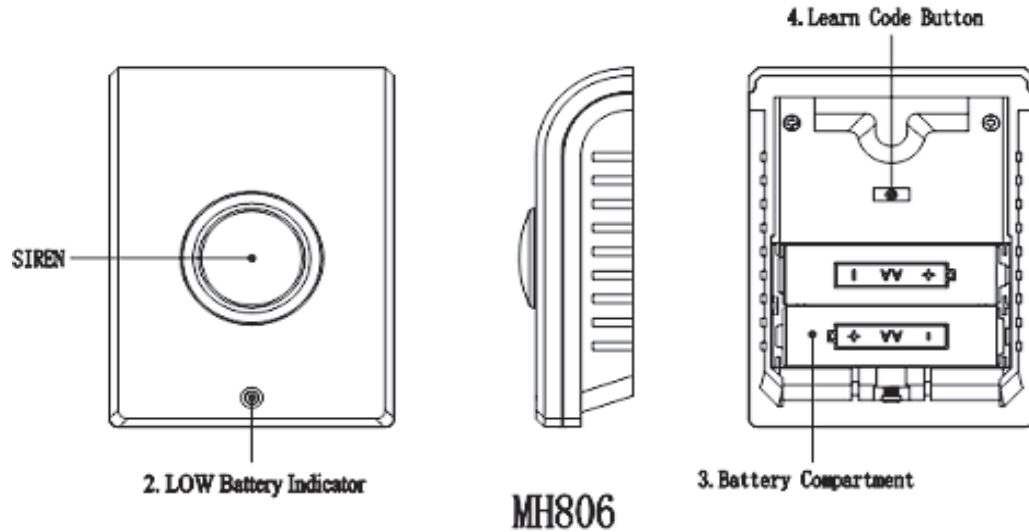

Battery Installation

Install batteries by removing the screw from rear of alarm. Insert two pieces "AA" alkaline batteries following diagram in battery compartment. When the last battery is inserted the alarm will beep to confirm battery installation properly. Replace back battery cover and fix with screw. The low battery indicator light will illuminate when the batteries need replacing.


Alarm Installation

After inserting batteries, install mini siren on the desired place by the supplied double side tape. Suggest to place the alarm on higher location where out of reach and keep in 80 meters with the paired units.

Connection Setting Management(Learn Code)

A. Connection setting :

under disarm mode with the batteries, press both the learn code button 4 behind the MH806 and the "learn code" button 3 on the remote controller (KF801) for 3 seconds, when MH806 "Beep" for twice then release button, LED will flash 3 times to confirm the connection set successfully.

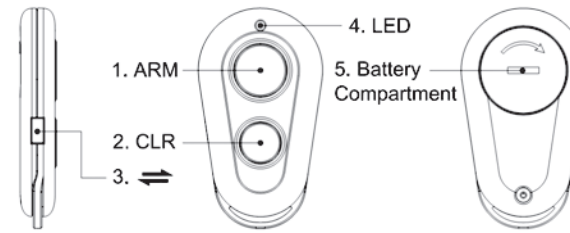

B. Connection Clearing:

Press and hold the learn code button behind MH806, and then reset the battery. when MH806 "beep" for 3 times, release the button, connection code have been cleared successfully

Operation Instruction

Arming & Disarming the Unit:

After sensors learn code(connect) with the remote, press the "ARM" button on the remote to arm or press "CLR" button on the remote to disarm the connected sensors.

Under arm mode, MH806 will alarm 10 second after other connected sensor triggered.

Battery Precaution

- ◆ Install appropriate size and polarity alkaline batteries into battery compartment. Incorrect polarity may cause damage to unit.
- ◆ Do not mix the different type of battery such as Alkaline and Carbon-zinc or old batteries with new, do not recharge batteries they are not intended to be recharged.
- ◆ Do not casually throw the battery after powerless. For the environment protect purpose, please follow the local regulation to deal with them.
- ◆ If not use for long period time, remove battery to prevent possible battery leakage.